




GB04/04521



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ



**PRIORITY  
DOCUMENT**  
SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, L.C. or L.C.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*Hevens*

Dated 17 November 2004

**BEST AVAILABLE COPY**

Patents Act 1977  
Rule 16

**Request for grant of a patent**

The  
**Patent  
Office**

27OCT03 EB47586-1 001072  
P01/7700 0.00-0324999.2

THE PATENT OFFICE  
WM  
27 OCT 2003  
RECEIVED BY FAX

The Patent Office  
Concept House  
Cardiff Road  
Newport NP10 8QQ

1. Your Reference	PUK031384		
2. Patent Application Number	0324999.2		
3. Full name, address and postcode of the or of each applicant	27 OCT 2003 WI (UK) Limited 6 Augustine Court Waltham Abbey Essex EN9 1JJ United Kingdom 8741506001 United Kingdom		
Patents ADP Number			
If the applicant is a corporate body, give the country/state of its incorporation	United Kingdom		
4. Title of the invention	Barrier Formation and Building Protected By Barrier		
5. Name of your agent	Hepworth Lawrence Bryer & Bizley		
"Address for Service" in the United Kingdom to which all correspondence should be sent	Bloxam Court Corporation Street Rugby Warwickshire CV21 2DU		
Patents ADP number	5608575007 ✓		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and the or each application number	Country	Priority Application Number	Date of Filing
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing	
8. Is a Statement of Invention and of right to grant of a patent required in support of this request	Yes		

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	8	/
Claim(s)	4	/
Abstract	1	/
Drawing(s)	1	only /

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translation of priority documents

Statement of Invention and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents

11.

I/We request the grant of a patent on the basis of this application

Signature Hepworth Lawrence Bryer & Bizley Date 27 October 2003  
Hepworth Lawrence Bryer & Bizley

12. Name and daytime telephone number of person to contact in the United Kingdom.

Gary March  
01788 577000

Duplicate

**BARRIER FORMATION AND BUILDING PROTECTED BY BARRIER**

The present invention is concerned with the formation of barriers against water entry and embraces buildings which have been protected by application of a barrier means thereto, which will prevent entry of water, such as flood water, into sub-floor area ventilators which are most commonly in the form of inbuilt air bricks. There is a need for a temporary flood protection means to be placed over sub-floor ventilators, such as air bricks, so as to prevent flood waters penetrating through the ventilator and into the building sub-floor area. If flood water penetrates through sub-floor area ventilators such as air bricks, there is likely to be damage to the building structure or foundations coupled with the difficulty of removing such flood water once it has penetrated into the sub-floor area and potential risks of damp or similar defects entering the internal parts of the building structure. Accordingly there is a need for a suitable barrier material, such as a water-proof or substantially water-resistant pad which can be applied to the ventilators, such as air bricks in a threatened flood condition and before flood water rises to a level where any of the material will be in contact with such water. In such threatened flood conditions it will be desirable for the material, which is most conveniently provided in the form of a pad, to be applied before flood water has reached the sub-floor ventilator level since the material may not bond or become bonded effectively to the brick work or mortar surrounding the ventilator with the consequence that a water proof or water impenetrable seal may not be created.

According to one aspect of this invention there is provided a method of forming a barrier against entry of water into a sub-floor ventilator of a building, which comprises adhesion of a sealant material to an external surface of said sub-floor ventilator. The ventilator preferably comprises at least one air brick within a wall of the building. The sealant material is most preferably a self-adhesive pad. This may be adhered to the external surface of the ventilator including the periphery of the ventilator. Preferably such self-adhesive pad can be adhered to the external surface of the ventilator and to building material immediately surrounding the periphery of the ventilator such as the adjacent brick work and/or mortar normally immediately adjacent the periphery of the ventilator.

The preferred self-adhesive pads used in the present invention are preferably removeable after use. Such pads may incorporate at least one self adhesive layer or medium. It is preferred for the sealant material (e.g. such self-adherent pads) to be flexible or at least semi-flexible. The

15

20

25

50

external layer prior to application of the material to a sub-floor ventilator. Such a liner may conveniently be comprised of at least one of the following materials, namely: siliconised plastic film such as siliconised low density polyethylene, polypropylene, polyester, high density polyethylene or siliconised paper.

5

If release liner is not present as part of the sealant material, then the sealant material could be supplied as a self-wound roll, where the backing substrate is itself siliconised on one side.

10

In accordance with a second aspect, the invention also provides a method of forming a barrier in which the sealant material is in the form of a composite laminate comprising a release liner and which method includes the following steps:

- a) providing a composite laminate including an adherent material and a release liner such that the laminate is in the form of a flexible or at least partly flexible pad,
- 15 b) removing the release liner from the composite to expose an adherent surface of the material,
- c) positioning the adhesive layer of the pad such that its exposed adherent surface is brought into contact with the exposed external surface of a sub-floor ventilator,
- d) applying the adherent surface to the said exposed surface of the ventilator and  
20 optionally into contact with the periphery of the ventilator and optionally into contact with building material surrounding the periphery of the said ventilator,
- e) applying pressure to that surface of the pad remote from the said adherent surface to cause the pad to cover in a water-sealing manner the said external surface of the ventilator, and optionally:
- 25 f) removing the adhered pad from the ventilator after a flood condition or threatened flood condition, and optionally:
- g) removing from the ventilator and/or the periphery of the ventilator and/or building material surrounding the periphery of the ventilator at least some excess adhesive material not removed in step f) above.

30

In a third aspect the invention also provides a building having a wall structure provided with at least one sub-floor ventilator, wherein a sealant material is adhered to an external surface of said ventilator, forming a barrier against entry of water into said ventilator. Similarly, such sealant material can be in the form of a self-adherent pad.

Such ventilator may typically comprise of one air brick. The self-adherent pad is preferably adhered to the external surface including the periphery of the ventilator. The pad can even more conveniently be adhered to the external surface of the ventilator and to building material immediately surrounding the periphery of the ventilator, such as the brickwork and/or mortar material immediately adjacent the periphery of the ventilator. It is preferred that within the scope of the third aspect of the present invention as defined above, the self-adherent pad is made or otherwise formed as defined above in connection with the first aspect of the present invention.

In application of embodiments of the invention it is most convenient and therefore preferred that the ventilator, such as the air brick, and the surrounding brickwork and/or mortar material to which the self-adherent pad is to bond, is cleaned prior to its application. In the absence of such cleaning procedures there is a risk that such self-adherent pads will not bond adequately or effectively to the ventilator and hence may not provide the protection against entry of water into the sub-floor area of a building as is intended: -

On the external surface of the ventilator, and upon the brickwork and/or mortar materials immediately surrounding the periphery of the exposed surface of the ventilator, any algae, dirt and dust should be removed, ideally by brushing with a stiff brush. Any puddles of water remaining on the air brick or brickwork should be wiped off before application of self-adherent pad e.g. with an appropriate dry cloth. In application of embodiments of the invention wherein the sealant is in the form of a pad or a cut portion from a wound roll, the pad or portion should be applied at a temperature greater than 0°C and more preferably greater than 4°C. The pads, if stored in cold conditions, may be easier to apply if stored for e.g. thirty minutes in an ambient or warm room e.g. at a temperature in the region of 15-25°C and preferably 18-25°C. Prior to application of a pad incorporating a release liner, the release liner should be removed from the pad to expose an adhesive surface of the adhesive layer which is preferably pigmented or coloured so as to match the surrounding brickwork e.g. red or brown or reddish-brown in colour. Steps should be taken to prevent the sealant from

In the event that an implement such as a small decorating roller is available, working from the centre of the pad, it is preferred to roll very firmly outward to the edges, covering the whole pad area to ensure that the pad has bonded evenly across its whole area. In the absence of  
5 such a roller implement, then it is possible to use an item such as the back of a tablespoon. Again working from the centre, the pad should be smoothed outwards to the edges using good hand pressure upon the bowl of the spoon and ensuring that the whole pad is smoothed to obtain adequate and good adhesion to the air brick. For those embodiments of the invention in the nature of a self-adherent pad, it is desirable to ensure that the adhesive component is  
10 pressed well into the mortar courses and/or any surrounding brick work around the periphery of the air brick.

Once floodwater has been dispersed or the threat of a flood condition is rescinded, the self-adherent pads should be removed from the ventilators to allow air once again to circulate as  
15 normal through the air brick.

In order to remove such a pad, it should normally only be necessary to lift one edge and pull the adhesive surface component of the pad away from the air brick. Some of the adhesive component may remain on the brick work and/or mortar immediately surrounding the  
20 periphery of the air brick, upon removal of the pad. Dabbing the adhesive surface of the pad onto all such items of adhesive residue is likely to assist and may effectively remove most of the remaining adhesive. As indicated above, in preferred embodiments of the invention, the adhesive component is itself coloured so as to match the shade of the air brick and/or surrounding brickwork so that if any small adhesive residue remains after removal, such  
25 remnants are likely to blend in with the brickwork and so not impair appearance of the building after complete removal of the pad.

In order that the invention may be illustrated, more easily appreciated and readily carried into effect by those skilled in the art, non-limiting embodiments will now be described purely by  
30 way of example only, with reference to the accompanying drawing in which FIGURE 1 is a schematic view of a suitable self-adherent laminated pad for use in the present methods and for use in the building aspect of the present invention.



Referring to FIGURE 1 the laminated sealant material comprises an optional layer (1) of siliconised high density polyethylene release liner which may have a thickness of the order 40 to 100 microns, preferably 50 to 80 microns.

5 Adjacent the release liner (1) there is provided an adhesive component which is preferably butyl-rubber or polyisobutylene-rubber based. In this embodiment the adhesive component is coloured a reddy brown to blend in with bricks of the building after removal should some adhesive debris be left behind. The thickness of this adhesive component is not especially crucial, although in preferred embodiments the thickness is conveniently of the order 1-2 mm.

10

The third component of the laminated sealant material is a backing substrate which as shown in Figure 1 comprises a composite layer (3) which consists of aluminium foil laminated to polyester film. The thickness of the aluminium foil is not especially crucial although for convenience this may have a thickness in the range of 10-30 microns or preferably 15-25  
15 microns. Similarly the thickness of the polyester film part of the composite does not appear especially crucial although for convenience it is preferred to use a polyester film having a thickness of 10-40 microns, preferably 15-35 microns, more preferably 20-30 microns.

20 With reference to the backing substrate of suitable self-adherent laminated pads, preferred embodiments of the invention are based on the use of a composite material which may consist of aluminium foil and polyester film laminated together.

In relation to the adhesive layer of suitable laminated self-adherent pads, it is preferred to use a butyl-rubber or polyisobutylene rubber based adhesive, filled with organic and mineral  
25 fillers and with polybutene and mineral plasticisers. Some processing aids, anti-oxidants and pigments are also preferably included within the formulation of the adhesive layer. Release liners, where present, serve to protect an exposeable adhesive surface prior to application of the pad to a sub-floor ventilator. As indicated in connection with Figure 1 herein, it is preferred for such release liner to comprise siliconised low density or high density  
30 polyethylene.

threatened or forewarned flood condition whether or not a flood subsequently takes place. To be most effective, the self-adherent pad should be applied to the air brick before the air brick has become in contact with water. The pad can be fabricated as a generally rectangular pad and of a size to cover standard size air bricks although a plurality of different sizes are possible. In order to apply the preferred product to a building structure, based on a three layered laminate, the consumer simply removes the backing release liner and applies the exposed adhesive surface across the air brick by applying pressure and working in the edges into the material surrounding the air brick using preferably an implement such as a small decorating roller or the back of a spoon. After a flood, or withdrawal of any threatened flood condition, the pad can be peeled away from all air bricks of the building upon which it has been applied and then disposed of. Any adhesive residue can be scrubbed off using a wire brush or alternatively by repeated application such as 'dabbing' of the removed pad. Embodiments of pads have been tested and were effective as a water sealant so as to prevent entry of water through an air brick into the sub-floor area of a building before the air brick has become submerged under water.

Reference will now be made to the following specific examples and test results:

Example 1

A self-adherent pad of sealant material was provided in the form of product reference Scapa 0314 which is a polyisobutylene-rubber based adhesive substrate laminated with an aluminium/polypropylene laminated film and including a siliconised release medium in the form of paper or film. The product Scapa 0314 is commercially available in the United Kingdom from Scapa UK Limited. The pad was applied to an in-built air brick ventilator which was subsequently exposed to water.

Example 2

A self-adherent pad of sealant material was provided in the form of product reference Scapa 0318 which is a polyisobutylene-rubber based adhesive substrate laminated with a spun-bonded polyester fabric and incorporating as part of the laminate prior to application, a siliconised release medium in the form of paper or film. The pad was applied to an in-built air brick ventilator which was subsequently exposed to water.

Test Result 1

Specific sealant materials of examples 1 and 2, having been applied in the form of pads to the external surfaces of air bricks inbuilt as part of an existing building were demonstrated to be effective in preventing passage of water through the air brick, and capable of subsequent removal without impeding airflow after use. In particular pads of these materials were constructed and applied as indicated above to airbricks with up to two courses of bricks of a building above covered with water at a height of the order six inches above the upper most edge of the airbrick. It was found that no detectable water had penetrated through the sealed airbricks, and the pads could be removed after use without blocking or impeding airflow through the airbrick after removal.

CLAIMS

- 1. A method of forming a barrier against entry of water into a sub-floor ventilator of a building, which comprises adhesion of a self-adherent sealant material, such as a self-adherent pad, to an external surface of said sub-floor ventilator.
- 2. A method as claimed in claim 1, wherein the ventilator comprises at least one airbrick within a wall of said building.
- 3. A method as claimed in either preceding claim, in which the sealant material is adhered to said external surface including the periphery of the ventilator.
- 4. A method as claimed in any preceding claim, in which the sealant material is adhered to said external surface of the ventilator and to building material immediately surrounding the periphery of the ventilator.
- 5. A method as claimed in claim 4, in which the building material comprises brickwork and/or mortar immediately adjacent the periphery of the ventilator.
- 6. A method as claimed in any preceding claim, in which the sealant material incorporates a removeable layer.
- 7. A method as claimed in any preceding claim, in which the sealant material is flexible or semi-flexible.
- 8. A method as claimed in any preceding claim, in which the sealant material is formed as a self-adherent pad, or a portion from a roll of material.
- 9. A method as claimed in any preceding claim, in which the pad is resiliently pliable.
- 10. A method as claimed in any preceding claim, in which the sealant material comprises a composite material.

11. A method as claimed in claim 10, in which the composite material comprises a laminate of two or more layers.
12. A method as claimed in claim 11, in which one of the layers comprises a release liner  
5 and is separable from the other layer or layers.
13. A method as claimed in claim 11 or 12, in which the laminate comprises a backing substrate and an adhesive substrate and optionally a release liner.
- 10 14. A method as claimed in claim 13, in which the backing substrate comprises waterproof plastics film and/or metal foil and/or waterproof fabric material.
- 15 15. A method as claimed in claim 14, in which the waterproof plastics film is selected from film of one or more of the following materials, namely polyester, polyethylene, polypropylene and polyvinylchloride.
16. A method as claimed in claim 13 or 14, wherein the metal foil comprises aluminium foil optionally laminated to polyethylene or polypropylene film.
- 20 17. A method as claimed in any one of claims 13 to 16, in which the waterproof fabric material is selected from polyester spunbonded (non-woven) fabric and polypropylene spunbonded (non-woven) fabric.
- 25 18. A method as claimed in any one of claims 14 to 17, in which the adhesive is a rubber based adhesive, comprising butyl-rubber or polyisobutylene rubber or alternatively comprising EPR, SBR, natural rubber or thermoplastic rubbers such as SIS, SBS or SEBS.
19. A method as claimed in any one of claims 13 to 18, in which the adhesive layer comprises rubber together with one or more of the following components, namely: bitumen.  
30 organic filler including resin, rosin, wax, oil, and other fillers, and other components.

comprised of at least one of the following materials, namely: siliconised plastic film such as siliconised low density polyethylene, polypropylene, polyester, high density polyethylene or siliconised paper.

5 21. A method of forming a barrier as claimed in any preceding claim, in which the sealant material includes a removeable liner, optionally as defined in claim 20, and which method includes the following steps:

- 10 a) providing a self-adherent pad and release liner composite which is flexible or at least partly flexible,
- b) removing the release liner from the composite so as to expose an adherent surface of the pad,
- c) positioning the pad such that its exposed adherent surface is brought into contact with the exposed external surface of a sub-floor ventilator,
- 15 d) applying the adherent surface of the pad to the said exposed surface of the ventilator and optionally into contact with the periphery of the ventilator and optionally into contact with building material surrounding the periphery of the said ventilator,
- e) applying a pressure to that surface of the pad remote from the said adherent surface to cause the pad to cover in a water-sealing manner the said external surface of the ventilator, and optionally
- 20 f) removing the adhered pad from the ventilator after a flood condition or threatened flood condition, and optionally
- g) removing from the ventilator and/or the periphery of the ventilator and/or building material surrounding the periphery of the ventilator at least some excess adhesive material not removed in step f) above.
- 25

30 22. A method of forming a barrier as claimed in any one of claims 1 to 21 substantially as herein described.

23. A method of forming a barrier as claimed in any one of claims 1 to 21 substantially as herein exemplified.


24. Use of a laminated self-adherent pad as illustrated herein in a method as claimed in any one of claims 1 to 21.
25. A building having a wall structure provided with at least one sub-floor ventilator,  
5 wherein a sealant material such as a self-adherent pad is adhered to an external surface of said ventilator, forming a barrier against entry of water into said ventilator:
26. A building as claimed in claim 25, wherein the ventilator comprises at least one  
10 airbrick.
27. A building as claimed in claim 25 or 26, wherein the sealant material is adhered to  
said external surface including the periphery of the ventilator.
28. A building as claimed in any one of claims 25 to 27, wherein the sealant material  
15 is adhered to said external surface of the ventilator and to building material immediately surrounding the periphery of the ventilator.
29. A building as claimed in claim 28, wherein the building material comprises  
20 brickwork and/or mortar immediately adjacent the periphery of the ventilator.
30. A building as claimed in any one of claims 25 to 29, wherein the sealant material  
is as defined in any one of claims 6 to 20.
31. A building as claimed in any one of claims 25 to 30 substantially as herein  
25 described.
32. A building as claimed in any one of claims 25 to 30 substantially as herein  
exemplified.
- 30 33. Use of a laminated sealant material as illustrated herein in a building as claimed in any  
one of claims 1 to 32

**ABSTRACT****BARRIER FORMATION AND BUILDING PROTECTED BY BARRIER**

- 5 A method of forming a barrier against entry of water into a sub-floor ventilator of a building, which comprises adhesion of a sealant material such as a self-adherent pad to an external surface of said sub-floor ventilator. The invention also provides in another aspect, a building having a wall structure provided with at least one sub-floor ventilator, wherein a sealant material such as a self-adherent pad is adhered to an external surface of said ventilator,
- 10 forming a barrier against entry of water into said ventilator.



**Figure 1**

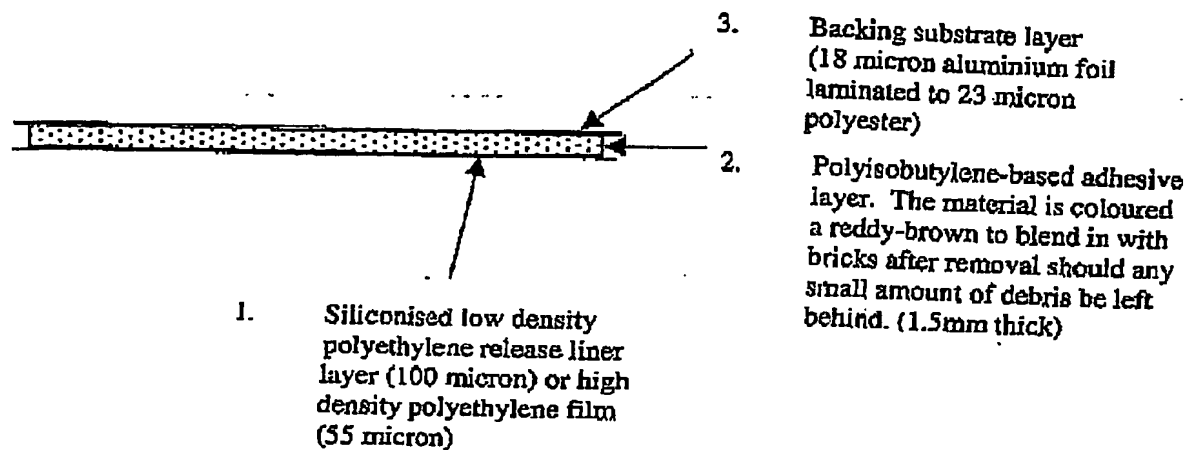

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record.**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**